

UPLIFT DESK[®] Adapt Pogo Desk Converter UPL141

WHAT'S IN THE BOX:

- (1) SIT/STAND MECHANISM
- (1) SIT/STAND BASE
- (4) ACORN SIDE-LOCK NUT
- (1) MONITOR BRACKET
- (2) #10-24 SEMS NUT
- (4) 4mm x 12mm PHPR SCREW
- (4) CORD CLIPS
- (3) CABLE TIES
- (1) 1/4-20 CARRIAGE BOLT
- (1) STEEL WASHER
- (1) LOCK RELEASE ASSIST HANDLE
- (4) #10 WASHERS

OPTIONAL ACCESSORY ITEMS:

- KEYBOARD TRAY (REQUIRED)
- DUAL MONITOR ADAPTER
- TABLEMATE


TOOLS REQUIRED:

- PHILLIPS SCREWDRIVER (SHORT)
- 3/8" WRENCH

- ①. PLACE THE BASE ON THE WORK SURFACE WITH THE PEM STUDS FACING UP.
- ②. SET THE SIT/STAND MECHANISM ONTO THE BASE, INSERTING THE (4) PEM STUDS INTO THE (4) HOLES ON THE MECHANISM. USING THE (4) ACORN NUTS AND (4) #10 WASHERS SUPPLIED, SECURE THE MECHANISM TO THE BASE. (SEE FIGURE 1)
- ③. REMOVE THE CABLE TIE RESTRAINING THE MECHANISM FROM INADVERTENT ACTUATION.
- ④. AFTER REMOVING THE CABLE TIE, THE MECHANISM WILL NEED TO BE ACTUATED IN ORDER TO ATTACH A MONITOR. KEEPING A HAND ON THE TRAY BRACKET WITH DOWNWARD FORCE, PRESS THE LOCK RELEASE BUTTON TO ALLOW THE MECHANISM TO RISE.
- ⑤. ATTACH THE SUPPLIED MONITOR BRACKET TO THE MONITOR WITH THE (4) SUPPLIED 4mm x 12mm PHPR SCREWS USING THE 75mm OR 100mm PATTERN PROVIDED. (SEE FIGURE 2)
- ⑥. ATTACH THE MONITOR WITH MONITOR BRACKET TO THE VERTICAL COLUMN USING THE (2) #10-24 SEMS NUTS PROVIDED. (SEE FIGURE 3)
- ⑦. ATTACH THE LOCK RELEASE ASSIST HANDLE TO THE TRAY BRACKET BY INSERTING THE 1/4-20 CARRIAGE BOLT WITH WASHER THRU THE SQUARE HOLE FROM THE INSIDE. WHILE HOLDING THE BOLT IN THE BRACKET, THREAD THE HANDLE ONTO THE BOLT AND TIGHTEN THE HANDLE. (SEE FIGURE 4)
- ⑧. ATTACH THE KEYBOARD TRAY TO THE TRAY BRACKET AND SECURE CORDS AND CABLES WITH THE CORD CLIPS PROVIDED. MAKE SURE CORDS AND CABLES HAVE PROPER LENGTH TO ALLOW FULL UP AND DOWN TRAVEL.

1/4-20 x 1/2
CARRIAGE BOLT
WITH WASHER
TO INSIDE OF
TRAY BRACKET

FIGURE 4

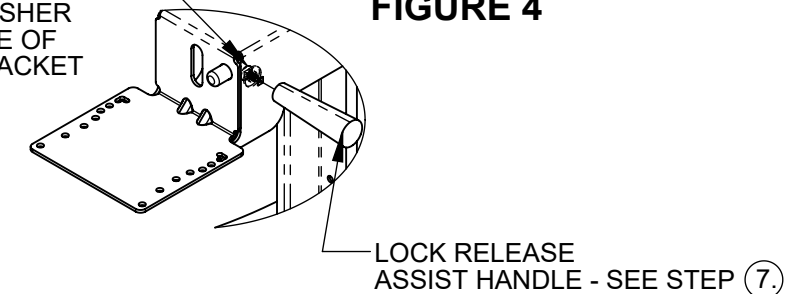

LOCK RELEASE
ASSIST HANDLE - SEE STEP ⑦

