



Assembly Instructions: Astra 2 Double Arm Desk Light

Parts

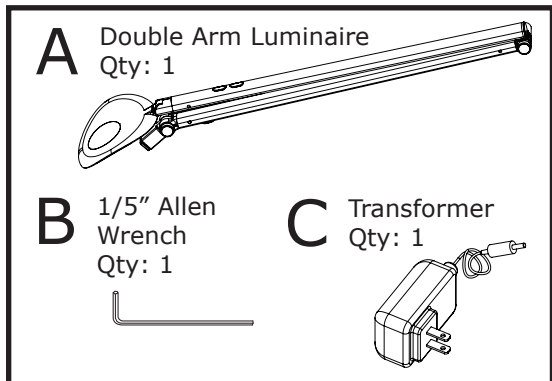

Required, Sold Separately

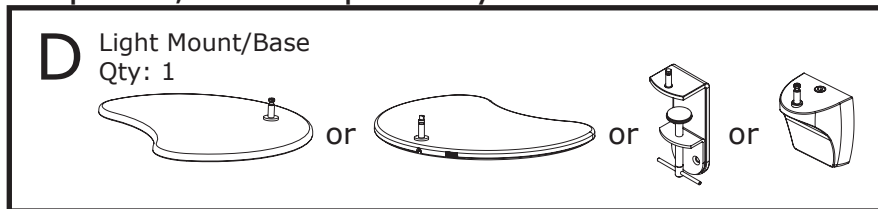


✓ Required Tools

A 1/5" Allen wrench is provided to tighten the set screw lock. No other tools are required to assemble the Astra 2.




1 Install Light Mount/Base in desired location.

Refer to the instructions that came with your chosen mount for detailed instructions.

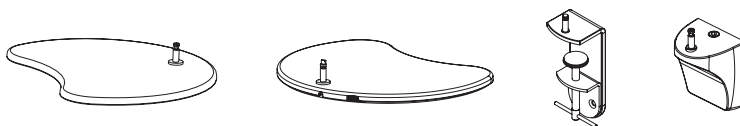


2 Attach Lamp to Mounting Post & Tighten Set Screw Lock

- a** Apply pressure until the Luminaire Arm (A) snaps onto the mounting post. Astra 2 mounts to all bases in the same fashion.
- b** Tighten Set Screw Lock clockwise with Allen wrench provided. The Set Screw Lock prevents the arm from being able to be removed from the base.

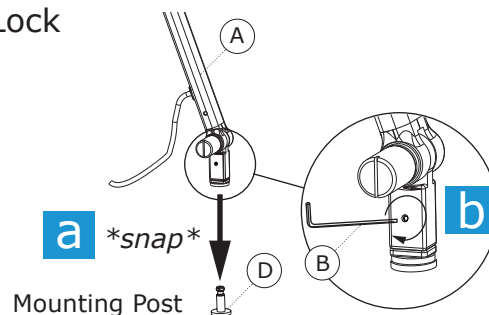


3 Attach to Transformer and plug into outlet

- a** Connect cord from Luminaire Arm (A) to the Transformer cord (B).
- b** Plug Transformer into 100–240 V wall outlet.

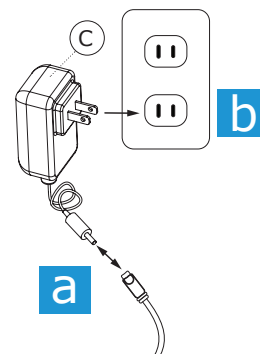

! Note! If attaching light to adjustable height worksurface, raise worksurface to the maximum height before positioning the fixture to ensure that cord will reach the outlet when worksurface is raised.

User Instructions: Astra 2 Double Arm Desk Light

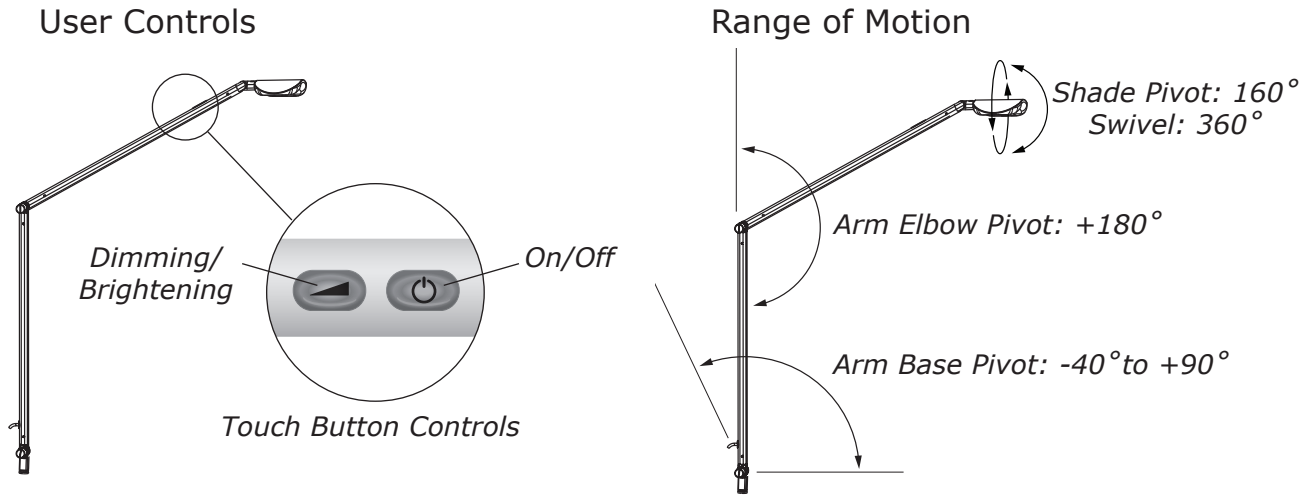

On/Off: Press and release the On/Off button once to turn on or off. Note: The lamp will return to the same brightness setting it was before being turned off.

Dimming: While the lamp is on, press & hold the dimmer button. Dimming will be continuous down to 5%.

Brightening: While lamp is on and dimmed to less than 100% brightness, double tap the dimming/brightening button. The lamp will return to full brightness.

Auto Shut-Off Programming

5 Hour Timer: Turn the lamp On. Press & hold the On/Off button for 15 seconds, then release the button. The light will emit a single flash to indicate the 5 hr Auto Shut-Off has been activated.

10 Hour Timer: Turn the lamp On. Press & hold the On/Off button for 20 seconds, then release the button. The light will emit a double flash to indicate the 10 hr Auto Shut-Off has been activated.

Disable Timer: Turn the lamp On. Press & hold the On/Off button for 30 seconds, then release the button. The light will emit a triple flash to indicate the Auto Shut-Off has been deactivated.

NOTE! The auto Shut-Off Programming will be overridden when an optional Occupancy Sensor is in use.

Parts & Support

- Standard Desk Base, SilverLTG-TB-ST-S
- Standard Desk Base, CharcoalLTG-TB-ST-C
- USB Desk Base, SilverLTG-TB-USB-S
- USB Desk Base, CharcoalLTG-TB-USB-C
- Two Piece Clamp, SilverLTG-CCB-TP-S
- Two Piece Clamp, CharcoalLTG-CCB-TP-C

- Tool Bar & Slatwall Mount, SilverLTG-TSB-ADJ-S
- Tool Bar & Slatwall Mount, Charcoal...LTG-TSB-ADJ-C
- Astra 2 Occupancy Sensor, SilverLTG-OCC-SWVL-S
- Astra 2 Occupancy Sensor, Charcoal ..LTG-OCC-SWVL-C
- Astra 2 Transformer.....TR-12240500-A-SF3.5