

Height Range	24.3"-49.9"
Travel Speed	1.57"/second
Noise Level	50 dB
Lifting Capacity	535 lbs
Current	5 amps max (during movement)
Voltage Input	100-120Vac, 50/60Hz, 500W max
Warranty	15 year



For help with assembly, see our assembly video at upliftdesk.com/3leg-srd-lshp



Triple Motor Design



3-Stage Legs Are 33% Faster Than 2-Stage Legs



Superior Anti-Collision Sensitivity



88 Accessory **Mounting Points**



on Each Leg 112 Whisper-Quiet

Stability Brace



Improved Stability with Precision **Tolerance Legs**



Included Under-Desk Wire Management




Available in 4 Color **Options**

BIFMA

Meets BIFMA X5.5-2014 **Durability Standard**

(i) For technical questions and support call 800-349-3839, email info@upliftdesk.com, or visit our chat service at upliftdesk.com














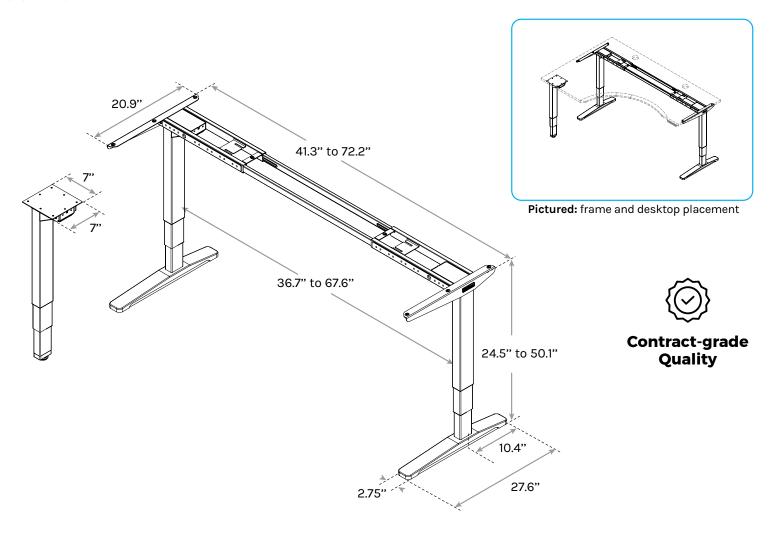

Height Range	24.5"-50.1"
Travel Speed	1.57"/second
Noise Level	50 dB
Lifting Capacity	535 lbs
Current	5 amps max (during movement)
Voltage Input	100-120Vac, 50/60Hz, 500W max
Warranty	15 year



For help with assembly, see our assembly video at upliftdesk.com/3leg-srd-lcor



Triple Motor Design



3-Stage Legs Are 33% Faster Than 2-Stage Legs



Superior Anti-Collision Sensitivity



48 Accessory **Mounting Points**



Stability Brace on Each Leg



Improved Stability with Precision **Tolerance Legs**



112 Whisper-Quiet **Adjustment**



Included Under-Desk Wire Management

Available in 4 Color **Options**



Meets BIFMA X5.5-2014 **Durability Standard**

(i) For technical questions and support call 800-349-3839, email info@upliftdesk.com, or visit our chat service at upliftdesk.com



