




MODEL 8209 Installation Instructions






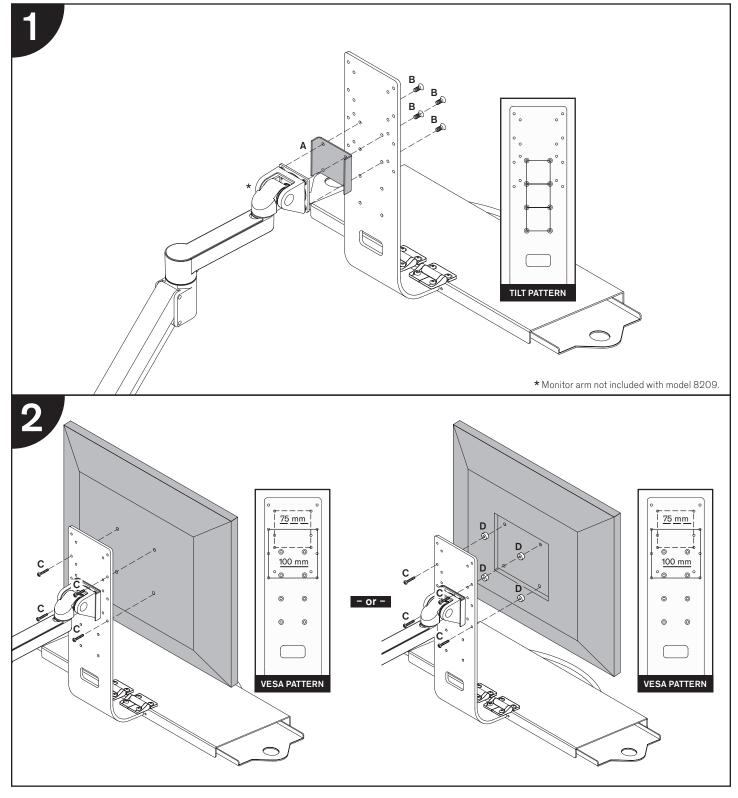

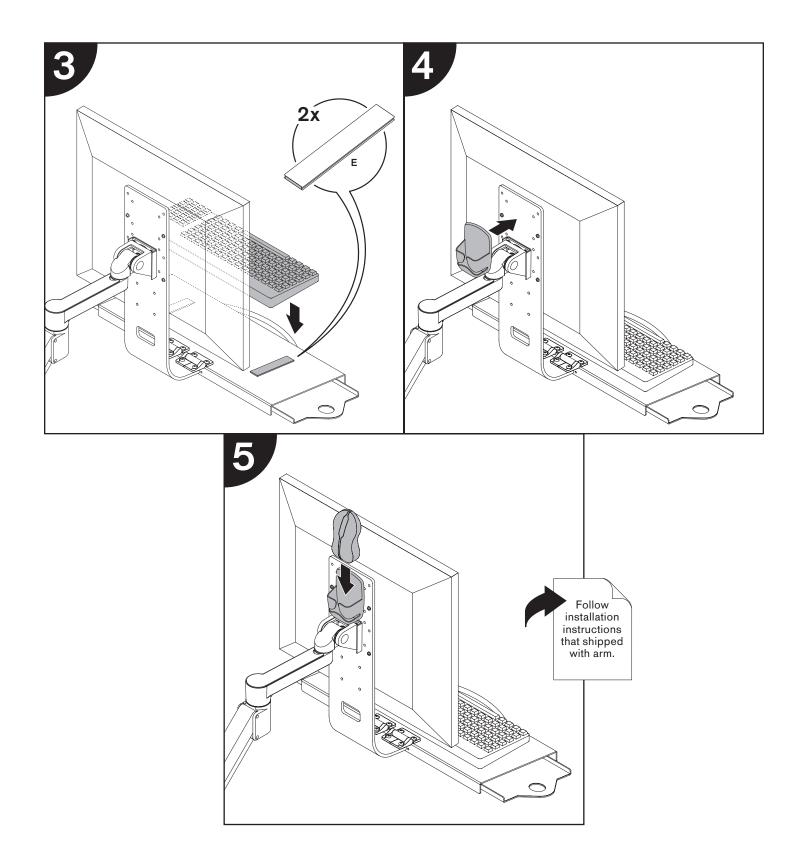

MODEL 8209 Parts List

ITEM	DESCRIPTION / PART NO. QUANTITY
A o o o o o o o o o o o o o o o o o o o	Rotation Prevention Bracket1702949
B	10-32 x 5/8" Phillips Flat Head Screw 4 702200
c C	M4 x 18mm Phillips Pan Head Screw 4 704917

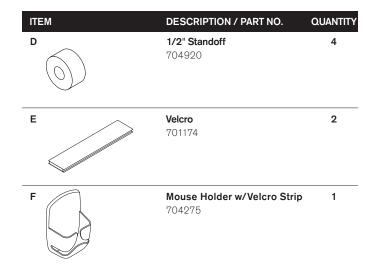


available at:




800.531.3746 info@thehumansolution.com thehumansolution.com



MODEL 7500 Installation Instructions




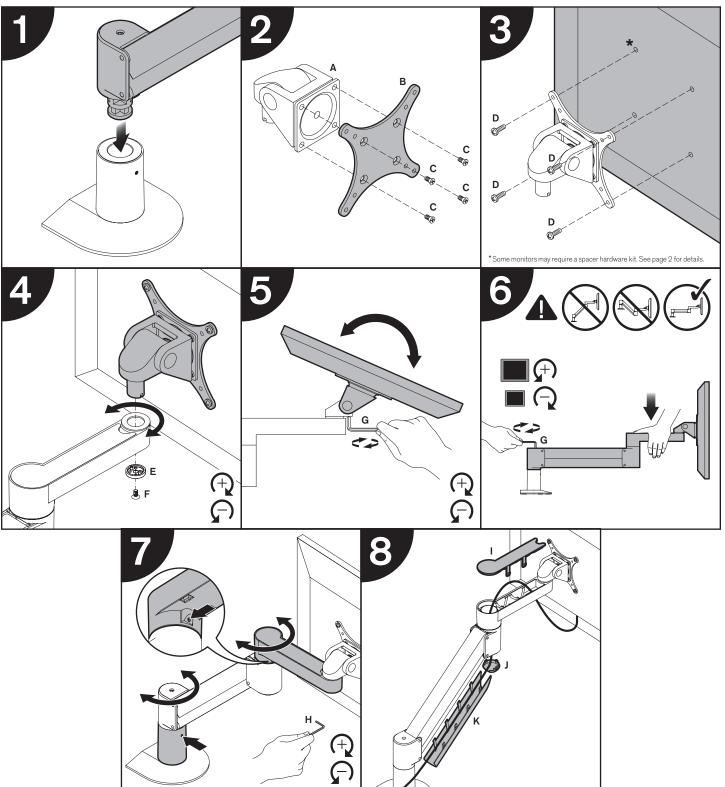




MODEL 7500 Parts List


ITE	M	DESCRIPTION / PART NO. Q	UANTITY
Α		Spring-Assisted Monitor Tilter 407747	1
В		75/100mm VESA® Adapter Plate 105587	e 1
С	ÐM	10-32 x 3/8" Phillips Flat Head Scr 702281	ew 1 (4-pack)
D		M4 x 12mm Phillips Pan Head Scre 702096	ew 1 (4-pack)
E		Dog Washer 105189	1
F	C.M.	10-32 x 3/8" FPhMS w/Lock Patc 705198	h 1

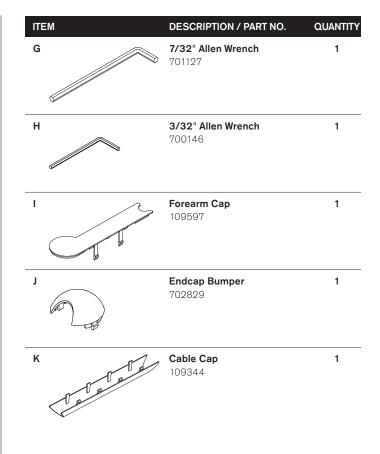

OPTIONAL SPACER KITS In some cases, the mounting surface on your monitor may be recessed further than permitted by VESA* standards. As a result, a spacer kit may be required.








.5" Spacer Hardware Kit (4) .5" Spacers (4) M4 x 25mm Phillips Pan Head Screws Order # P404923-C

www.LCDarms.com 800.524.2744

This product is protected by one or more of the following U.S. Patent Nos. and other United States and foreign patents applied for: 119,346, 119,346, 1,324,842, 2,470,525, 6,076,785, 6,273,383, 6,409,134, 6,478,274, 6,499,704, 6,505,988, 6,609,691, 619,606, 6,719,253, 6,726,167,6,736,364,6,783,105,6,854,698,6915,994,6,935,883,6,953,286,983,917,6,986,489,7014,157,7017,874,7048,242,7069,574,7063,296,7066,433,7066,435,7389,965,7665,699,D435,852,D491,962,D492,893,D570,853,D575,293.



How do I counterbalance my arm?

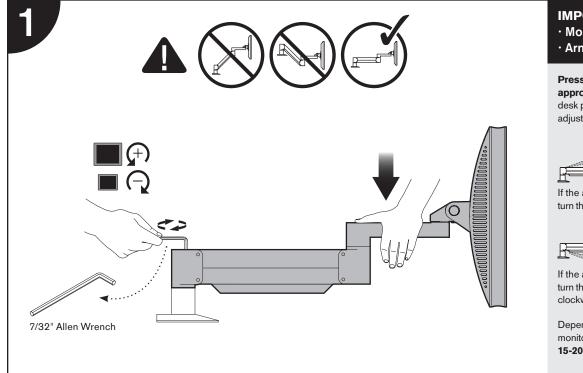

R

3/32" Allen Wrench

IMPORTANT!

Monitor must be on arm
Arm must be in mount

Arm must be in moun

Press the arm down to

approximately parallel with the desk prior to turning the strength adjustment screw.



If the arm **drifts upward**, turn the adjustment screw clockwise.



If the arm **drifts downward**, turn the adjustment screw counterclockwise.

Depending on the weight of your monitor, you may have to make 15-20 turns.

In some instances, further counterbalance adjustments are needed to allow the arm's instant height adjustment function to work properly.

If your arm is not staying in position after performing step 1, follow these steps:



With arm in raised position, tighten set screw (A).



With arm in horizontal position, tighten set screw **(B)**.

Do not over tighten screws.

www.LCDarms.com 800.524.2744