


Specifications

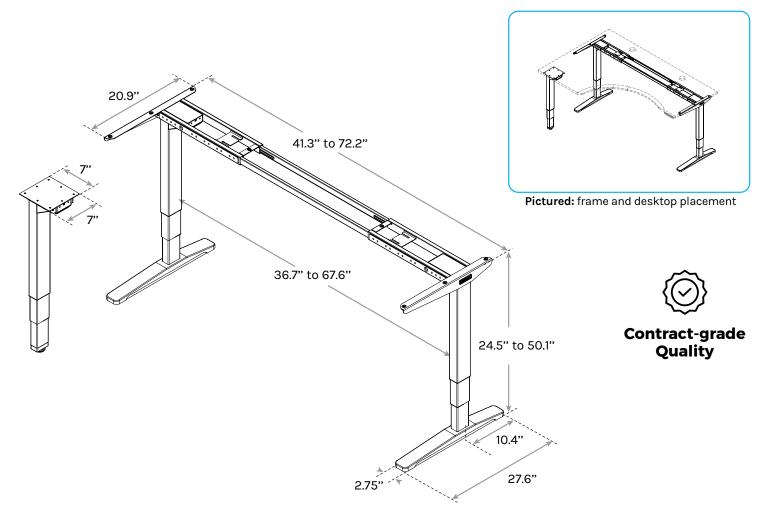

Height Range	24.5"-50.1"	<u> </u>	Triple Motor Design	≣⊙	3-Stage Legs Are 33% Faster Than 2-Stage Legs
Travel Speed	1.57"/second				
Noise Level	50 dB	(D)	Superior Anti-Collision Sensitivity		48 Accessory Mounting Points
Lifting Capacity	535 lbs				
Current	5 amps max (during movement)		Stability Brace on Each Leg	B	Improved Stability with Precision Tolerance Legs
Voltage Input	100-120Vac, 50/60Hz, 500W max	-	Whiener Outet	~	-
Warranty	15 year	12	Whisper-Quiet Adjustment	S	Included Under-Desk Wire Management
For help with assembly, see our assembly video at upliftdesk.com/3leg-srd-lcor		\checkmark	Available in 4 Color Options	BIFMA	Meets BIFMA X5.5-2014 Durability Standard

(i) For technical questions and support call 800-349-3839, email info@upliftdesk.com, or visit our chat service at upliftdesk.com