



BIG REACH, BIG PERFORMANCE

The Astra 2 Double Arm was designed to provide outstanding reach in a small footprint. With nearly 3 feet of extension from the base and a 360° rotating head, the Astra 2 Double Arm puts illumination exactly where it is needed. Clustered high-output, high CRI LEDs, provide a crisp, white light with no shadowing effect.

The new touch button programmability enables the user to return to the same dimming level that the light was last used, double touch the control to move to maximum brightness instantaneously, or to program the light for auto shut off after 5 or 10 hours of use. Combine the Astra 2 Double Arm with the all new USB Charging Table Base for the ultimate in reach and convenience.



Touch button design with auto shut-off programming and brightness memory.




Available with 4 mounting/base options including a convenient USB Table Base.

ASTRA 2 DOUBLE ARM LED DESK LIGHT

Astra 2 Double Arm

Double Arm Luminaire




- Double arm design provides 34.5" reach
- Exceptional light color accuracy (94 CRI)
- Multiple mounting options
- Programmable auto shut-off
- Brightness memory (dimming to 5%)
- Secure mounting lock
- Occupancy sensor compatible
- Built-in power extension cord (6')
- Available in Silver & Charcoal
- ETL Certified/UL Listed
- Energy Star Compliant (luminaries v 1.2)
- 50,000+ hour LED life (L70 rating)
- 5 year fixture warranty
- Transformer included:
 - Type A, wall plug transformer with 6' cord
 - 12 W, 24 V, 0.5 A, Class 2


Color	Model #	Weight	List
Silver	AST2-DA-WOB-S	3	\$335
Charcoal	AST2-DA-WOB-C	3	\$335

Dimensions

Horizontal and vertical reach

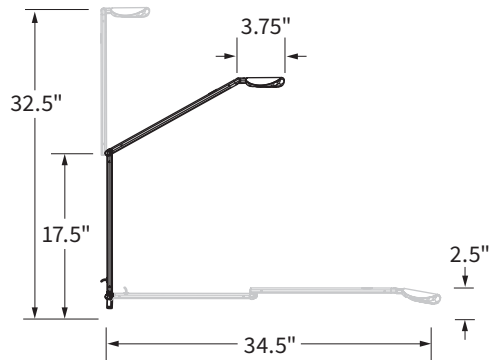

Fixture rotation

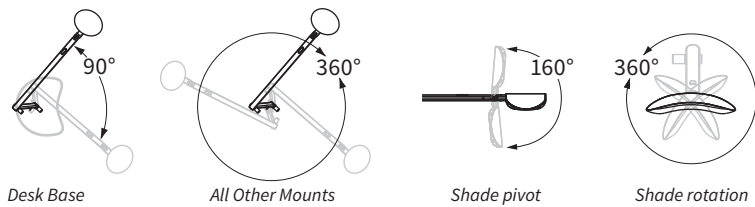

Specifications

- Foot Candle Power (@ 15"): 106 fc
- Light Output (lumens): 306 lm
- Power Consumption (wattage): 6.1 W
- Lumens per Watt: 50 lm/W
- Light color temperature (CCT): 3200 K
- Color Rendering Index (CRI): 94 CRI


Colors



Silver Charcoal
(Shown with optional Table Base)

Photometrics

Source at 15"

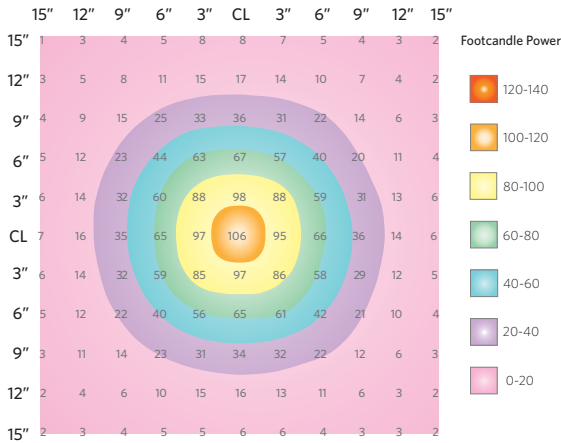

ASTRA 2 DOUBLE ARM LED DESK LIGHT

Base & Mounting Options (required)

Table Base



- Sturdy yet movable, this 4 pound table base lets you put your light exactly where you want it
- Dimensions: 7.5"W × 9"D × .4"H

Color	Model #	Weight	List
Silver	LTG-TB-ST-S	4	\$35
Charcoal	LTG-TB-ST-C	4	\$35


USB Table Base



- Convenient USB power port allows users to charge a phone or tablet device with a Type A USB power cable (USB cable not included)
- Power Output: 5 V, 1100 mA, 5.5 W
- Dimensions: 7.5"W × 9"D × .4"H

Silver	LTG-TB-USB-S	4	\$55
Charcoal	LTG-TB-USB-C	4	\$55

Two Piece C-Clamp Mount



- The sturdiest and most compact mounting solution
- Two piece design provides easy installation in space constrained environments
- Attaches to surfaces .25" – 2.5" thick
- Dimensions: 2"W × 1.75"D × 4.5" H

Silver	LTG-CCB-TP-S	1	\$20
Charcoal	LTG-CCB-TP-C	1	\$20

Tool Bar, Slatwall Mount



- Add some height to your light and conserve desk space, by mounting it to a Workrite Tool Bar
- Adjustable clamp design is also compatible with any 90° edge .5" – 1.75" Slatwall system
- Dimensions: 2.5"W × 2"D × 2.8"H

Silver	LTG-TSB-ADJ-S	1	\$35
Charcoal	LTG-TSB-ADJ-C	1	\$35

Optional Accessories


Occupancy Sensor





- Add to Astra models for energy savings
- Turns light off after 15 minutes of inactivity and instantly back on when activity is detected
- Swivels to direct sensor to area of activity

Silver	LTG-OCC-SWVL-S	1	\$55
Charcoal	LTG-OCC-SWVL-C	1	\$55

Height & width




Range & field of view



Replacement Parts

Astra Replacement Transformer







- Type A, wall plug transformer with 6' cord
- 12 W, 24 V, 0.5 A, Class 2

Black	TR-12240500-A-SF3.5	1	\$22
-------	---------------------	---	------

ASTRA 2 DOUBLE ARM LED DESK LIGHT

PRODUCT COMPARISON: DESKTOP TASK LIGHTING

	 Astra 2	 Astra 2	 Fundamentals	 Natural
CONFIGURATION	Double Arm	Single Arm	Single Arm	Single Arm
LIGHT OUTPUT				
Foot Candle Power (@ 15")	106 fc	106 fc	78 fc	108 fc
Peak Lumen Output	306 lm	306 lm	184 lm	442 lm
Color Temperature	3200 K	3200 K	3200 K	3900 K
CRI	94	94	81	94
Dimming	Continuous down to 5%	Continuous down to 5%	Continuous down to 15%	Two step
ENERGY EFFICIENCY				
System Power Consumption	6.1 W	6.1 W	3.4 W	13.7 W
Lumens per Watt	50 lm/W	50 lm/W	54 lm/W	32 lm/W
PIR Occupancy Sensor Option	●	●		
Programmable Auto Shutoff	●	●		
L70 Estimated Life	50,000+ hours	50,000+ hours	40,000+ hours	30,000+ hours
FIXTURE HOUSING				
Reach	34.5"	19.5"	14.5"	10.5"
Shade Rotation	360°	360°	360°	
Shade Tilt/Pivot	160°	160°		
User Controls/ Switch Type	Programmable touch button	Programmable touch button	Touch button	Touch button
Number of LED's In Fixture	6	6	21	One OLED panel
MOUNTING OPTIONS				
Table Base	●	●	●	●
USB Table Base	●	●		
Two Piece C-Clamp Mount	●	●		
Tool Bar/Slatwall Mount	●	●		
Available Fixture Colors	Silver & charcoal	Silver & charcoal	Silver	Silver
WARRANTY				
Fixture	5 years	5 years	5 years	5 years
Transformer	1 year	1 year	1 year	1 year